


Internal turning tool



clamping insert by screw

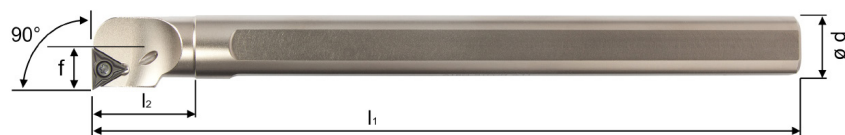

Type A-STFCR/L

| Order code | Dimensions (mm) | | | | | Insert | Spare parts | | | | Stock |
|------------------|-----------------|----------------|----------------|------|------------------|---------|-------------|-----------|--------------|------|-------|
| | d | l ₁ | l ₂ | f | D _{min} | | Pad | Pad screw | Insert screw | Key | |
| A 10K STFCR/L 11 | 10 | 125 | 22,8 | 7 | 13 | | | | | | ○ |
| A 12L STFCR/L 11 | 12 | 140 | 26,5 | 9 | 16 | TCMT 11 | | | VT25B | BT08 | ○ |
| A 16Q STFCR/L 11 | 16 | 180 | 26,7 | 11 | 20 | | | | | | ○ |
| A 20R STFCR/L 16 | 20 | 200 | 36,6 | 13 | 25 | | | | | | ○ |
| A 25R STFCR/L 16 | 25 | 200 | 41 | 17 | 32 | TCMT 16 | | | VT40B | BT15 | ○ |
| A 32S STFCR/L 16 | 32 | 250 | 34,6 | 21,9 | 40 | TCMT 16 | US5511 | GBS1111 | SS1111 | BT15 | ○ |
| A 40T STFCR/L 16 | 40 | 300 | 37,5 | 27 | 49 | | | | | | ○ |

○ = delivery within a week