



Upínač pro nástrčné frézy

Shell mill holders with coolant exit bores on the end face



DIN 6357

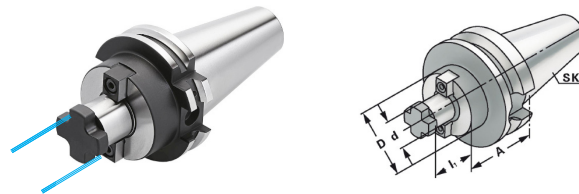

Katalogové číslo Catalog number	Kužel Taper	d	D	A	l ₁		G 2,5 25.000 min ⁻¹
BT40.40.N.16.AD	BT40	16	38	40	17	AD	•
BT40.40.N.22.AD	BT40	22	48	40	19	AD	•
BT40.40.N.27.AD	BT40	27	58	40	21	AD	•
BT40.50.N.32.AD	BT40	32	78	50	24	AD	•
BT40.50.N.40.AD	BT40	40	88	50	27	AD	•
BT40.40.N.16.ADB	BT40	16	38	40	17	AD/B	•
BT40.40.N.22.ADB	BT40	22	48	40	19	AD/B	•
BT40.40.N.27.ADB	BT40	27	58	40	21	AD/B	•
BT40.50.N.32.ADB	BT40	32	78	50	24	AD/B	•
BT40.50.N.40.ADB	BT40	40	88	50	27	AD/B	•
BT40.100.N.16.ADB	BT40	16	38	100	17	AD/B	•
BT40.100.N.22.ADB	BT40	22	48	100	19	AD/B	•
BT40.100.N.27.ADB	BT40	27	58	100	21	AD/B	•
BT40.100.N.32.ADB	BT40	32	78	100	24	AD/B	•
BT40.100.N.40.ADB	BT40	40	88	100	27	AD/B	•
BT40.160.N.16.ADB	BT40	16	38	160	17	AD/B	•
BT40.160.N.22.ADB	BT40	22	48	160	19	AD/B	•
BT40.160.N.27.ADB	BT40	27	58	160	21	AD/B	•
BT40.160.N.32.ADB	BT40	32	78	160	24	AD/B	•
BT40.160.N.40.ADB	BT40	40	88	160	27	AD/B	•
BT50.40.N.22.ADB	BT50	22	48	40	19	AD/B	•
BT50.40.N.27.ADB	BT50	27	58	40	21	AD/B	•
BT50.50.N.32.ADB	BT50	32	78	50	24	AD/B	•
BT50.50.N.40.ADB	BT50	40	88	50	27	AD/B	•
BT50.80.N.60.ADB	BT50	60	129	80	40	AD/B	•
BT50.100.N.22.ADB	BT50	22	48	100	19	AD/B	•
BT50.100.N.27.ADB	BT50	27	58	100	21	AD/B	•
BT50.100.N.32.ADB	BT50	32	78	100	24	AD/B	•
BT50.100.N.40.ADB	BT50	40	88	100	27	AD/B	•
BT50.160.N.22.ADB	BT50	22	48	160	19	AD/B	•
BT50.160.N.27.ADB	BT50	27	58	160	21	AD/B	•
BT50.160.N.32.ADB	BT50	32	78	160	24	AD/B	•
BT50.160.N.40.ADB	BT50	40	88	160	27	AD/B	•

d = 40/d = 60: pro velké průměry fréz se čtyřmi závitovými otvory dle DIN 2079

delivery: s upínacím šroubem s křížovou hlavou a s upínacím šroubem s válcovou hlavou dle DIN 912 pro frézy s vnitřním chlazením

pro d = 60 pouze se čtyřmi upínacími šrouby dle DIN 912

d = 40/d = 60: for large diameter face mill cutters with four additional threaded holes according to DIN 2079

delivery: with drivers, cross head retaining screw and cylinder head retaining screw for cutters with central coolant

for d = 60 only with four four fixation screws according to DIN 912

S výstupními otvory chlazení na čele upínače

With enlarged contact face and coolant exit bores on the end face

