



Upínač pro frézy se závitem

Milling arbors for screw-in cutters

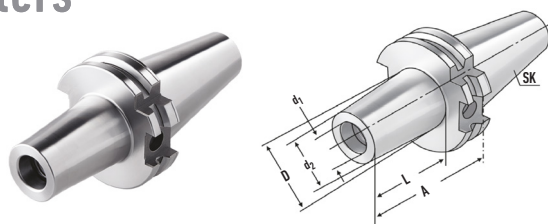

Název Catalog number	Kužel Taper	M	D	d ₁	d ₂	L	A		G 2,5 25.000 min ⁻¹
SK40DK.44.M.12.ADB	SK40DK	12	24	21	12,5	25	44	AD/B	•
SK40DK.69.M.12.ADB	SK40DK	12	24	21	12,5	50	69	AD/B	•
SK40DK.94.M.12.ADB	SK40DK	12	31	21	12,5	75	94	AD/B	•
SK40DK.24.M.16.ADB	SK40DK	16	29	29	17	5	24	AD/B	•
SK40DK.44.M.16.ADB	SK40DK	16	29	29	17	25	44	AD/B	•
SK40DK.69.M.16.ADB	SK40DK	16	34	29	17	50	69	AD/B	•
SK40DK.94.M.16.ADB	SK40DK	16	34	29	17	75	94	AD/B	•

Doporučené utahovací momenty

Recommended tightening torques

M6	10 Nm
M8	25 Nm
M10	40 Nm
M12	50 Nm
M16	60 Nm