


Kleština RS pro silové upínače



Reduction sleeves for high performance milling chucks

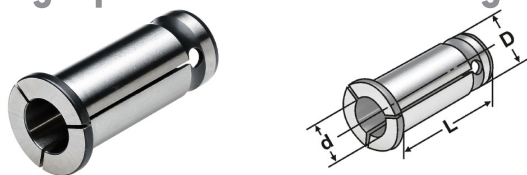

obvodové házení $\leq 0,005$

radial run-out $\leq 0,005$

Název Catalog number	d	D	L
RS20 D..	3, 4, 5, 6, 8, 10, 12, 14, 16	20	53
RS25 D..	6, 8, 10, 12, 14, 16, 18, 20	25	60
RS32 D..	6, 8, 10, 12, 14, 16, 18, 20, 25	32	73

poznámka: pro upínání hladké stopky v toleranci h6


note: the chucking diameter is configured for a tool tolerance of h6

Kleština RS_B pro silové upínače

Reduction sleeves for high performance milling chucks

pro vnitřní chlazení do 80 barů

coolant proof up to max. 80 bar

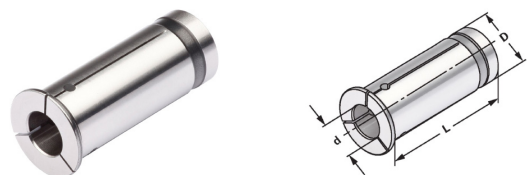

obvodové házení $\leq 0,005$

radial run-out $\leq 0,005$

Název Catalog number	d	D	L
RS20B D..	3, 4, 5, 6, 8, 10, 12, 14, 16	20	52,9
RS25B D..	3, 4, 5, 6, 8, 10, 12, 14, 16, 18, 20	25	52,5
RS32B D..	3, 4, 5, 6, 8, 10, 12, 14, 16, 18, 20, 25	32	66

poznámka: pro upínání hladké stopky v toleranci h6

note: the chucking diameter is configured for a tool tolerance of h6