



# Tažné čepy ISO 7388

## Pull studs

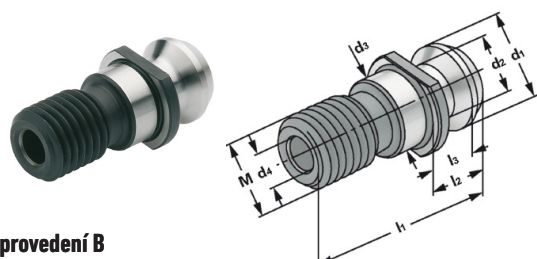

**provedení B**  
form B

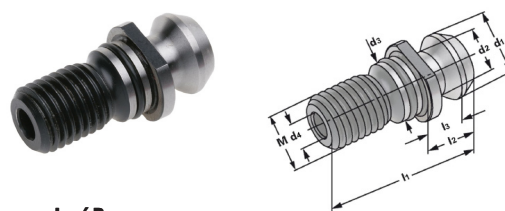

**provedení B**  
form B

### provedení B - vrtaný bez „O“ kroužku form B - with drill through | without O-ring

Název Catalog number	M	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>
7388.M16.K	M16	44,5	16,40	11,15	18,95	12,95	17	7,0
7388.M24.K	M24	65,5	25,55	17,95	29,10	19,60	25	11,5

### provedení B - vrtaný s „O“ kroužkem form B - with drill through | incl. O-ring

7388.M16.KO	M16	44,5	16,40	11,15	18,95	12,95	17	7,0
7388.M24.KO	M24	65,5	25,55	17,95	29,10	19,60	25	11,5

### provedení 7388 - nevrtaný s „O“ kroužkem form 7388 - sealed | incl. O-ring

7388.M16.O	M16	44,5	16,40	11,15	18,95	12,95	17	-
7388.M24.O	M24	65,5	25,55	17,95	29,10	19,60	25	-

### provedení 7388 - nevrtaný bez „O“ kroužku form 7388 - sealed | without O-ring

7388.M24	M24	65,5	25,55	17,95	29,10	19,60	25	-
----------	-----	------	-------	-------	-------	-------	----	---

## ISO 7388 | prodloužený + 3 mm

### Centric inner cooling supply | lengthened by 3 mm



### vrtaný s „O“ kroužkem with drill through | incl. O-ring

Název Catalog number	M	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>
7388.M16.KO.3	M16	47,5	19,25	14,15	18,95	12,95	17	7,3