


# Tažné čepy

## Pull studs

JIS B 6339 (MAS 403 BT) prodloužené + 3 mm  
lengthened by 3 mm

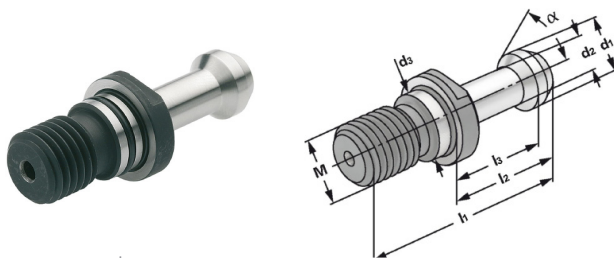

vrtaný s „0“ kroužkem with drill through | incl. O-ring


Název Catalog number	M	$\alpha$	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>
6399.M16.45.K0.3	M16	45°	57	32	25	15	10	17	4,0
6399.M16.60.K0.3	M16	60°	57	32	25	15	10	17	4,0
6399.M16.90.K0.3	M16	90°	57	32	25	15	10	17	4,0

nevrtaný s „0“ kroužkem sealed | incl. O-ring

Název Catalog number	M	$\alpha$	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>
6399.M16.45.O.3	M16	45°	57	32	25	15	10	17	17
6399.M16.60.O.3	M16	60°	57	32	25	15	10	17	17
6399.M16.90.O.3	M16	90°	57	32	25	15	10	17	17

## DIN 2080 s drážkou Ott

### Pull studs DIN 2080 with Ott-groove

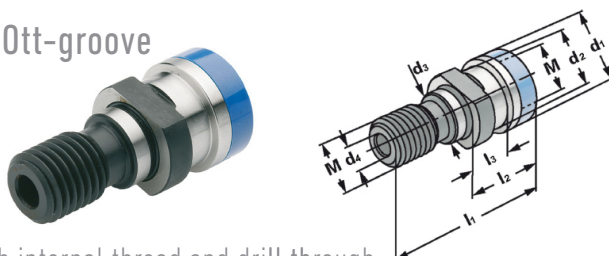

vrtaný s vnitřním závitem with internal thread and drill through

Název Catalog number	M	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>
2080.M16.K	M16	53,0	25,1	13,6	25,00	21,1	17	7,0
2080.M24.K	M24	65,1	25,1	13,3	39,60	32,0	25	7,0